



www.jingeao.com



Catalogue



Remote Control



WIFI
USB connector
Wired network

HDMI connector
Supporting 32G TF card(Max)

- 1.Pixel:1920x1080
- 2.Option:Transparent screen or non-transparent screen
- 3.Stored goods can be well seen through transparent screen

- 1.Remote controlled realized a situation of updating video or pics.showed on the screen can be changed anytime.
- 2.To help the user establish platform to control each screen that its system.



Customized cabinet sticker

- 1. ROM : 8GB;
- 2. Distinguishability:1920X1080 ;
- 3. Wifi function ;
- 4.Supporting video: AVI MP4, MOV, WMV, RM, RMVB
- 5. Supporting music: MP3, WAV, AAC, AMR, MMF, OGG;
- 6.Supporting pictures: JPG、PNG etc .
- 7. Aspect Ratio:16:9



Ningbo Jingeao Electronics Co.,Ltd

Add: No.2,Jinyuan Rd.,Longshan Industrial Zone 315311,Cixi Zhejiang ,China .

Tel:0086-574-63973728 159 8867 6660 150 5807 8348

FAX:0086-574-63973722

Email: gongyd@jingeao.com & cooler@jingeao.com

freezer@jingeao.com & china@jingeao.com & fridge@jingeao.com

http://www.jingeao.com

http://jingeo.en.alibaba.com

OEM & ODM Manufacturer

Beverages Refrigerator & Freezer Supplier



Production workshop






Ningbo Jingeao Electronics Co.Ltd is an export-oriented enterprise that combines research, produce ,sale and service together . The factory building is 15,000 square meters. Has sheet metal, spraying, foaming, final assembly, testing, packaging complete modern commercial display refrigerator production line. Our company is specialized in all kinds of display coolers.Now we have 4 series products;display cooler & freezer (beverages refrigerator;beer cooler ; drink cooler;milk cooler ; wine cooler; freezer;etc) ;toolbox refrigerator ;ice cream freezer ;medical refrigerator .

Company products are certified by GS ,CE,ETL,ROHS etc .We take the opportunity to get certification of ISO9001,and established a scientific and programmed quality management system.Meanwhile ,by investment Jingeao greatly improves its testing equipment and laboratories ,By applying the new technology and new equipment ,Jingeao ensures the stability of its product quality ,we do our best to meet the requirement of our clients.

With the managing ideal of be honestly to the customers , human oriental be realistic and meanwhile innovative ,because of its excellent quality beautiful design ,and durable characters earned a good reputation on the global market .We warmly welcome customers all over the word to cooperate with us .

CertifiCated or brand cooperation

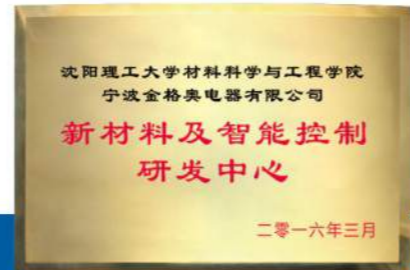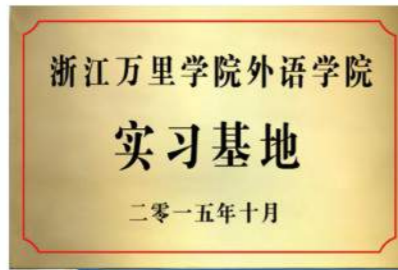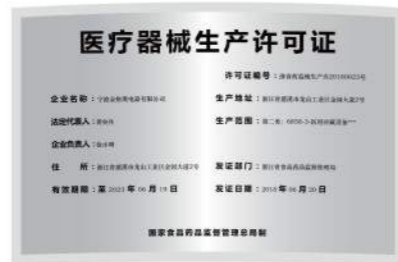

CONTENTS

01-02	Transparent LCD Fridge
03-04	Ice Cream Freezer with LCD Screen
05-06	Toolbox Fridge
07-8	Display Cooler
09-10	Display Cooler
11-18	Beverages Fridge & Freezer
19-20	Ice Cream Freezer
21-22	Warmer Box with LCD Screen
23	Car Fridge Coffee Cooler
24	Beer Cooler
25-28	Medical Refrigerator
29-30	Vending Machine



JINGEAO®
JINGEAO Electronics

TRANSPARENT LCD FRIDGE



Remote Control



- 1.Pixel:1980×1080
- 2.Option: transparent LCD screen or non-transparent LCD screen
- 3.Stored goods can be well seen through transparent LCD screen
- 4.Remote controlled realized a situation of updating video or pics. showed on the screen can be changed anytime
- 5.To help the user establish platform to control each that under its system

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG、PNG etc.
7. Aspect Ratio:16:9



Ice Cream Freezer with LCD Screen

www.jingao.com



JGA-SC42F

Cooling: By compressor, temperature can be adjustable manually between -25 to -18°C

Refrigerant: R134a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 130W

Power consumption: 1.6kW·h/24h

Climate class: N

N.W./G.W.: 26/28KG

Interior size: 280×330×450MM(W×D×H)

Product size: 420×454×880MM(W×D×H)

Carton size: 465×510×927MM(W×D×H)

FCL: 110PCS/20GP 230PCS/40GP 230pcs/40HQ

Features:

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting Video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting Music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG 、 PNG etc .
7. Aspect Ratio :16:9

JGA-SC58F

Cooling: By compressor, temperature can be adjustable manually between -25 to -18°C

Refrigerant: R134a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 150W

Power consumption: 1.8kW·h/24h

Climate class: N

N.W./G.W.: 31/35KG

Interior size: 320×310×590MM(W×D×H)

Product size: 460×463×1020MM(W×D×H)

Carton size : 590×590×1062MM(W×D×H)

FCL: 54PCS/20GP 114PCS/40GP 114PCS/40HQ

Features:

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting Video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting Music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG 、 PNG etc .
7. Aspect Ratio : 16:9



JGA-SC80F

Cooling: By compressor, temperature can be adjustable manually between -25 to -18°C

Refrigerant: R134a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 200W

Power consumption: 2.0kW·h/24h

Climate class: N

N.W./G.W.: 62/66KG

Interior size: 455×405×455MM(W×D×H)

Product size : 595×560×963MM(W×D×H)

Carton size : 660×645×1030MM(W×D×H)

FCL: 54PCS/20GP 108PCS/40GP 108PCS/40HQ

Features:

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting Video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting Music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG 、 PNG etc .
7. Aspect Ratio : 16:9



JGA-SC120F

Cooling: By compressor, temperature can be adjustable manually between -25 to -18°C

Refrigerant: R134a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 200W

Power consumption: 2.0kW·h/24h

Climate class: N

N.W./G.W.: 67/71KG

Interior size : 455×405×575MM(W×D×H)

Product size : 595×560×1003MM(W×D×H)

Carton size : 660×645×1150MM(W×D×H)

FCL: 54PCS/20GP 108PCS/40GP 108PCS/40HQ

Features:

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting Video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting Music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG 、 PNG etc .
7. Aspect Ratio : 16:9

JGA-SC228F

Cooling: By compressor, temperature can be adjustable manually between -25 to -18°C

Refrigerant: R404a

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 520W

Power consumption: 5.5kW·h/24h

Climate class: N

N.W./G.W.: 105/109KG

Interior size: 455×414×970MM(W×D×H)

Product size : 595×620×1800MM(W×D×H)

Carton size : 660×684×1875MM(W×D×H)

FCL: 27PCS/20GP 54PCS/40GP 54PCS/40HQ

Features:

T-LCD Screen Introduce:

1. ROM : 8GB;
2. Distinguishability:1920X1080 ;
3. Wifi function ;
- 4.Supporting Video: AVI, MP4, MOV, WMV, RM, RMVB
5. Supporting Music : MP3, WAV, AAC, AMR, MMF, OGG ;
- 6.Supporting Pictures: JPG 、 PNG etc .
7. Aspect Ratio : 16:9





JGA-SC50C-1

Cooling: By compressor (brand: Bingfeng), temperature can be adjustable manually between 0-10°C

Refrigerant: R134a/R600a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 82W

Power consumption: 0.85kW·h/24h

Climate class: N

N.W./G.W.: 22/25KG

Product size: 435x515x680MM (WxDxH)

Carton size: 550x615x755MM (WxDxH)

Interior size: A, 355x370x196MM (WxDxH)

B, 355x240x190MM (WxDxH)

FCL: 108PCS/20GP 228PCS/40GP 228PCS/40HQ

Features:

- With 1 drawers at top
- With 4 wheels (3 inch)
- With 5 SS decorations at the front panel
- With plastic inner tank
- With one shelf



JGA-SC50C-3

Cooling: By compressor (brand: Bingfeng), temperature can be adjustable manually between 0-10°C

Refrigerant: R134a/R600a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 82W

Power consumption: 0.85kW·h/24h

Climate class: N

N.W./G.W.: 35/40KG

Product size: 435x515x810MM (WxDxH)

Carton size: 550x615x880MM (WxDxH)

Interior size: A, 355x370x196MM (WxDxH)

B, 355x240x190MM (WxDxH)

FCL: 72PCS/20GP 152PCS/40GP 228PCS/40HQ

Features:

- With 3 trays at top
- With 4 wheels (3 inch)
- With 7 SS decorations at the front panel
- With plastic inner tank
- With one shelf



JGA-SC50C-2

Cooling: By compressor (brand: Bingfeng), temperature can be adjustable manually between 0-10°C

Refrigerant: R134a/R600a/R290

Power supply: 110V/60Hz, 220-240V/50Hz

Input power: 82W

Power consumption: 0.85kW·h/24h

Climate class: N

N.W./G.W.: 28/32KG

Product size: 435x515x745MM (WxDxH)

Carton size: 550x615x820MM (WxDxH)

Interior size: A, 355x370x196MM (WxDxH)

B, 355x240x190MM (WxDxH)

FCL: 72PCS/20GP 152PCS/40GP 228PCS/40HQ

Features:

- With 2 drawers at top
- With 4 wheels (3 inch)
- With 6 SS decorations at the front panel
- With plastic inner tank
- With one shelf



Display Cooler

www.jingao.com



JGA-SC21S

Cooling: By compressor, temperature range 0-10°C

Refrigerant: R134a/R600a/R290

Input Power: 76W

Voltage: 110V/60HZ or AC220V/50HZ

Climate class: N

N.W./G.W.: 15/16.5KG

Interior size: A, 240x276X168MM(WxDxH)

B, 240x141X185MM (WxDxH)

Product size : 330X410X474MM (WxDxH)

Carton size : 375x455X515MM (WxDxH)

FCL: 312PCS/20GP 624PCS/40GP 780PCS/40HQ

JGA-SC50S

Cooling: By compressor, temperature can

be adjustable manually between 0-10°C

Refrigerant: R134a/R600a/R290

Voltage: AC110V/60Hz, 200-240V/50Hz

Input power: 82W

Power consumption: 0.8kW·h/24h

Climate class: N

N.W./G.W.: 22/24KG

Product size: 440x420x605MM(WxDxH)

Interior size: A, 360x280x350MM(WxDxH)

B, 360x80x150MM(WxDxH)

Carton size : 495x508x675MM(WxDxH)

FCL: 144PCS/20GP 276PCS/40GP 276PCS/40HQ

Display Cooler

www.jingao.com



JGA-SC68S

Cooling: By compressor, temperature can be adjustable manually between 0-10°C

Refrigerant: R600a/R290

Voltage: AC110V/60Hz, 200-240V/50Hz

Input power: 82W

Power consumption: 0.8kW•h/24h

Climate class: N

N.W./G.W.: 25/29KG

Product size: 440×420×810MM(W×D×H)

Interior size: A, 360×325×525MM(W×D×H)

B, 360×80×205MM(W×D×H)

Carton size: 495×525×880MM(W×D×H)

FCL: 88PCS/20GP 192PCS/40GP 288PCS/40HQ



JGA-SC68

Cooling: By compressor, temperature can be adjustable manually between 0-10°C

Refrigerant: R600a/R290

Power supply: 110V/60Hz, 200-240V/50Hz

Input power: 82W

Power consumption: 0.8kW•h/24h

Climate class: N

N.W./G.W.: 25/29KG

Interior size: A, 355×370×361MM(W×D×H)

B, 355×241×210MM(W×D×H)

Product size: 435×498×678MM(W×D×H)

Carton size: 480×525×725MM(W×D×H)

Size of sticker:

Top panel: 430×411MM(W×D)

Side panel: 411×650MM(D×H)

FCL: 144PCS/20GP 288PCS/40GP 288PCS/40HQ

JGA-SC80S

Cooling: By compressor, temperature can be adjustable manually between 0-10°C

Refrigerant: R600a/R290

Voltage: AC110V/60Hz, 200-240V/50Hz

Input power: 94W

Power consumption: 1.0kW•h/24h

Climate class: N

N.W./G.W.: 31/33KG

Product size: 440×420×885MM(W×D×H)

Interior size: A, 360×280×600MM(W×D×H)

B, 360×80×205MM(W×D×H)

Carton size: 495×508×955MM(W×D×H)

FCL: 88PCS/20GP 184PCS/40GP 184PCS/40HQ



JGA-SC68

Cooling: By compressor, temperature can be adjustable manually between 0-10°C

Refrigerant: R600a/R290

Power supply: 110V/60Hz, 200-240V/50Hz

Input power: 82W

Power consumption: 0.8kW•h/24h

Climate class: N

N.W./G.W.: 25/29KG

Interior size: A, 355×370×361MM(W×D×H),

B, 355×241×210MM(W×D×H)

Product size: 435×498×678MM(W×D×H)

Carton size: 480×525×725MM(W×D×H)

Size of sticker:

Top panel: 430×411MM(W×D)

Side panel: 411×650MM(D×H)

FCL: 144PCS/20GP 288PCS/40GP 288PCS/40HQ



Beverages Fridge & Freezer

www.jingao.com

Display cooler (customized product)
front and back open door



Milk display cooler



JGA-SC21

Climate class: N
 Temperature: 0°C to 4°C
 Refrigerant: R600a/R290
 Voltage: AC110V/60HZ or AC200-240V/50HZ
 Power consumption: 0.7kW·h/24h
 Input power: 76W
 N.W./G.W.: 15/16KG
 Interior size: A, 240x276x168MM(WxDxH)
 B, 240x141x185MM(WxDxH)
 Product size : 330x410x474MM(WxDxH)
 Carton size: 375x455x515MM(WxDxH)
 FCL : 312PCS/20GP 624PCS/40GP 780PCS/40HQ

JGA-SC42

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
 Refrigerant: R600a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 82W
 Power consumption: 0.7kW·h/24h
 Climate class: N
 N.W./G.W.: 19/21KG
 Interior size : 324x276x452MM(WxDxH)
 Product size: 400x414x725MM(WxDxH)
 Carton size : 445x456x765MM(WxDxH)
 Size of sticker :
 Top panel: 392x274MM(WxD)
 Side panel: 274x687MM(WxH)
 Lambox: 390x174MM(WxH)
 FCL : 195PCS/20GP 390PCS/40GP 390PCS/40HQ



Customized product
T-LCD JGA-SC42

JGA-SC35

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
 Refrigerant: R600a/R290
 Power supply: 110V/60Hz, 200-240V/50Hz
 Input power: 82W
 Power consumption: 0.85kW·h/24h
 Climate class: N
 Interior size: A, 355x227.5x317MM(WxDxH)
 B, 355x84x213MM(WxDxH)
 N.W./G.W.: 22/25KG
 Product size : 435x309x635MM(WxDxH)
 Carton size : 480x380x685MM(WxDxH)
 FCL: 216PCS/20GP 432PCS/40GP 432PCS/40HQ



Beverages Fridge & Freezer

www.jingao.com



JGA-SC21
 Cooling: By compressor, temperature range 0-10°C
 Refrigerant: R600a/R290
 Input Power: 76W
 Voltage: 110V/60HZ or AC220V/50HZ
 Climate class: N
 N.W./G.W.: 15/16.5KG
 Interior size: A, 240x276X168MM(WxDxH)
 B, 240x141X185MM (WxDxH)
 Product size : 330X410X474MM (WxDxH)
 Carton size : 375x455X515MM (WxDxH)
 FCL: 312PCS/20GP 624PCS/40GP 780PCS/40HQ



JGA-SC68
 Cooling: By compressor, temperature can be adjustable manually between 0-10°C
 Refrigerant:R600a/R290
 Power supply: 110V/60Hz, 200-240V/50Hz
 Input power:82W
 Power consumption: 0.85kW·h/24h
 Climate class: N
 N.W./G.W.: 25/29KG
 Interior size: A, 355x370X361MM(WxDxH)
 B, 355x241X210MM (WxDxH)
 Product size : 435X498X678MM (WxDxH)
 Carton size : 480x525X725MM (WxDxH)
 Size of sticker:
 Top panel:431×411MM(W×D)
 Side panel:411×650MM(D×H)
 FCL: 144PCS/20GP 288PCS/40GP 288PCS/40HQ

JGA-SC21F
 Cooling: By compressor, temperature range 0 to -15°C
 Refrigerant: R600a/R290
 Input Power: 82W
 Voltage: 110V/60HZ or AC220V/50HZ
 Climate class: N
 N.W./G.W.: 19/20.5KG
 Interior size: A, 250x286X187MM(WxDxH)
 B, 250x141X185MM (WxDxH)
 Product size : 350X419X494MM (WxDxH)
 Carton size : 450x520X570MM (WxDxH)
 FCL: 220PCS/20GP 460PCS/40GP 460PCS/40HQ



Beverages Fridge & Freezer

www.jingao.com



JGA-SC20

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Voltage: AC110V/60Hz, 200-240V/50Hz
Input power: 76W
Power consumption: 0.55kW·h/24h
Climate class: N
N.W./G.W.: 15/16.5KG
Interior size: 250×230×325MM(W×D×H)
Product size: 330×360×567MM(W×D×H)
Carton size: 381×396×629MM(W×D×H)
Size of sticker:
Top panel: 322×267MM(W×D)
Side panel: 267×537MM(W×D)
Lambox: 319×143MM(W×H)
FCL: 252PCS/20GP 540PCS/40GP 720PCS/40HQ



JGA-SC42

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Voltage: AC110V/60Hz, 200-240V/50Hz
Input power: 82W
Power consumption: 0.7kW·h/24h
Climate class: N
N.W./G.W.: 19/21KG
Interior size: 324×280×451MM(W×D×H)
Product size: 400×400×715MM(W×D×H)
Carton size: 445×446×778MM(W×D×H)
Size of sticker:
Top panel: 390×316MM(W×D)
Side panel: 316×686MM(W×H)
Lambox: 392×174MM(W×H)
FCL: 195PCS/20GP 390PCS/40GP 390PCS/40HQ



JGA-SC58

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Voltage: AC110V/60Hz, 200-240V/50Hz
Input power: 82W
Power consumption: 0.85kW·h/24h
Climate class: N
N.W./G.W.: 22/25KG
Interior size: 350×325×515MM(W×D×H)
Product size: 420×444×775MM(W×D×H)
Carton size: 465×490×835MM(W×D×H)
FCL: 110PCS/20GP 240PCS/40GP 360PCS/40HQ



JGA-SC80

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Voltage: AC110V/60Hz, 200-240V/50Hz
Input power: 94W
Power consumption: 1.0kW·h/24h
Climate class: N
N.W./G.W.: 28/31KG
Interior size: 370×325×650MM(W×D×H)
Product size: 460×454×914MM(W×D×H)
Carton size: 500×505×975MM(W×D×H)
FCL: 88PCS/20GP 184PCS/40GP 184PCS/40HQ

JGA-SC120

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Voltage: AC110V/60Hz, 200-240V/50Hz
Input power: 110W
Power consumption: 1.3kW·h/24h
Climate class: N
N.W./G.W.: 36/39KG
Interior size: 420×400×757MM(W×D×H)
Product size: 500×529×1032MM(W×D×H)
Carton size: 550×570×1090MM(W×D×H)
FCL: 80PCS/20GP 168PCS/40GP 168PCS/40HQ



Beverages Fridge & Freezer

www.jingao.com



JGA-SC98

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Power supply: 110V/60Hz, 200-240V/50Hz
Input power: 104W
Power consumption: 1.2kW·h/24h
Climate class: N
N.W./G.W.: 31/34KG
Interior size: A, 406x361X534MM(WxDxH)
 B, 406x211X210MM (WxDxH)
Product size : 470X472X836MM (WxDxH)
Carton size : 510x525X875MM (WxDxH)
Size of sticker:
Top panel: 431x412MM(WxD)
Side panel: 412x466MM(DxH)
FCL: 88PCS/20GP 184PCS/40GP 276PCS/40HQ



JGA-SC50

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Power supply: 110V/60Hz, 200-240V/50Hz
Input power: 82W
Power consumption: 0.85kW·h/24h
Climate Class: N
N.W./G.W.: 22/25KG
Interior size: A, 355x370X196MM(WxDxH)
 B, 355x240X190MM (WxDxH)
Product size : 435X495X493MM (WxDxH)
Carton size : 480x544X545MM (WxDxH)
Size of sticker:
Top panel: 431x412MM(WxD)
Side panel: 412x466MM(DxH)
FCL: 192PCS/20GP 384PCS/40GP 384PCS/40HQ

JGA-SC50

Cooling: By compressor, temperature can be adjustable manually between 0-10°C
Refrigerant: R600a/R290
Power supply: 110V/60Hz, 200-240V/50Hz
Input power: 82W
Power consumption: 0.85kW·h/24h
Climate class: N
N.W./G.W.: 22/25KG
Interior size: A, 355x370X196MM(WxDxH)
 B, 355x240X190MM (WxDxH)
Product size : 435X495X493MM (WxDxH)
Carton size : 480x544X545MM (WxDxH)
Size of sticker:
Top panel: 431x412MM(WxD)
Side panel: 412x466MM(DxH)
FCL: 192PCS/20GP 384PCS/40GP 384PCS/40HQ





JGA-SC20F
 Cooling: By compressor, temperature can be -25 to -18°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 84W
 Power consumption: 1.4kW·h/24h
 Climate class: N
 N.W./G.W.: 20/22KG
 Interior size: 260x250x300MM(W×D×H)
 Product size: 400x415x643MM(W×D×H)
 Carton size: 445x446x690MM(W×D×H)
 FCL: 189PCS/20GP 390PCS/40GP 390PCS/HQ



JGA-SC68F
 Cooling: By compressor, temperature can be -25 to -18°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 180W
 Power consumption: 2.0kW·h/24h
 Climate class: N
 N.W./G.W.: 46/50KG
 Interior size: A, 455x405x295MM(W×D×H)
 B, 455x225x160MM(W×D×H)
 Product size: 595x570x835MM(W×D×H)(including lightbox 155MM)
 Carton size: 660x645x880MM(W×D×H)(including lightbox 155MM)
 FCL: 54PCS/20GP 108PCS/40GP 162PCS/HQ

JGA-SC42F
 Cooling: By compressor, temperature can be -25 to -18°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 130W
 Power consumption: 1.6kW·h/24h
 Climate class: N
 N.W./G.W.: 23/25KG
 Interior size: 280x300x450MM(W×D×H)
 Product size: 420x460x775MM(W×D×H)
 Carton size: 465x510x840MM(W×D×H)
 FCL: 110PCS/20GP 230PCS/40GP 345PCS/HQ



JGA-SC98F
 Cooling: By compressor, temperature can be -25 to -18°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 200W
 Power consumption: 2.2kW·h/24h
 Climate class: N
 N.W./G.W.: 55/60KG
 Interior size: A, 455x405x415MM(W×D×H)
 B, 455x225x160MM(W×D×H)
 Product size: 595x570x955MM(W×D×H)(including lightbox 155MM)
 Carton size: 660x645x1000MM(W×D×H)(including lightbox 155MM)
 FCL: 54PCS/20GP 108PCS/40GP 108PCS/HQ



JGA-SC58F
 Cooling: By compressor, temperature can be -25 to -18°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 150W
 Power consumption: 1.8kW·h/24h
 Climate class: N
 N.W./G.W.: 28/32KG
 Interior size: 320x311x590MM(W×D×H)
 Product size: 460x480x915MM(W×D×H)
 Carton size: 500x540x975MM(W×D×H)
 FCL: 88PCS/20GP 176PCS/40GP 176PCS/HQ



JGA-SC120F
 Cooling: By compressor, temperature can be -25 to -15°C
 Refrigerant: R134a/R290
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 200W
 Power consumption: 2.2kW·h/24h
 Climate class: N
 N.W./G.W.: 60/65KG
 Product size: 595x570x980MM(W×D×H)
 Interior size: 455x405x575MM(W×D×H)
 Carton size: 660x610x1075MM(W×D×H)
 FCL: 48PCS/20GP 108PCS/40GP 120PCS/HQ

Warmer Box with LCD Screen

www.jingao.com



JGA-SR58
 Capacity: 58L
 Heating : Interior temperature can be warm to 50 °C to 60 °C by air heating .
 Voltage: AC110V/60Hz, 200-240V/50Hz
 Input power: 500W
 Power consumption: 3kW·h/24h
 Climate class: N
 N.W./G.W.: 22/25KG
 Interior size: 350×325×515MM(W×D×H)
 Product size : 420×444×775MM(W×D×H)
 Carton size : 465×490×835MM(W×D×H)
 FCL : 110PCS/20GP 240PCS/40GP 360PCS/40HQ



JGA-SR42
 Capacity: 42L
 Heating : Interior temperature can be warm to 45°C to 50°C by air heating
 Input power: 500W
 Power consumption: 3kW·h/24h
 Interior size: 280×300×450MM(W×D×H)
 Product size : 420×545×880MM(W×D×H)
 Carton size : 465×510×927MM(W×D×H)
 N.W./G.W.: 20/22KG
 FCL: 110PCS/20GP 230PCS/40GP 230PCS/40HQ

JGA-SR58
 Capacity: 58L
 Heating : Interior temperature can be warm to 45°C to 50°C by air heating
 Input power: 500W
 Power consumption: 3kW·h/24h
 Interior size: 320×310×590MM(W×D×H)
 Product size : 460×463×1020 MM (W×D×H)
 Carton size : 590×590×1062MM(W×D×H)
 N.W./G.W.: 25/29KG
 FCL: 54PCS/20GP 114PCS/40GP 114PCS/40HQ



JGA-SR68
 Capacity: 68L
 Heating : Interior temperature can be warm to 45°C to 50°C by air heating
 Input power: 500W
 Power consumption: 3kW·h/24h
 Interior size: 519×432×573MM(W×D×H)
 Product size : 595×520×720MM(W×D×H)
 Carton size : 635×586×765MM(W×D×H)
 N.W./G.W.: 36/40KG



JGA-SR80
 Capacity: 80L
 Heating : Interior temperature can be warm to 45°C to 50°C by air heating
 Input power: 500W
 Power consumption: 3kW·h/24h
 Interior size: 455×405×455MM(W×D×H)
 Product size : 595×560×963 MM (W×D×H)
 Carton size : 660×645×1035MM(W×D×H)
 N.W./G.W.: 52/56KG
 FCL: 54PCS/20GP 108PCS/40GP 108PCS/40HQ

Car Fridge

www.jingao.com



Coffee Cooler

Coffee cooler

Cooling: By compressor, temperature can be adjustable manually between 2-7°C

Refrigerant: R600a/R290
Power supply: 110V/60Hz, 200-240V/50Hz
Input power: 82W
Power consumption: 0.7kW•h/24h
Climate class: N
N.W./G.W.: 13/15KG
Interior size: 193×160×188MM(W×D×H)
Product size: 274×427×365MM(W×D×H)
Carton size: 330×505×440MM (W×D×H)



Beer Cooler

www.jingao.com



JGA-SD35F

Cooling: By compressor, temperature range -18 to -25°C
Refrigerant: R290
Input Power: 150W
Voltage: 110V/60HZ or AC220V/50HZ
Climate class: N
Interior size: 220×260×382MM(W×D×H)
Unit size: 360×430×700MM(W×D×H)
Carton size: 420×480×770MM(W×D×H)
N.W./G.W.: 26/28KG

Spring fridge

Cooling: By compressor, temperature range 0-10°C
Refrigerant: R600a/R290
Input Power: 102W
Voltage: 110V/60HZ or AC220V/50HZ
Climate class: N
Unit size: 409×557×1050MM(W×D×H)
Carton size: 490×636×1097MM(W×D×H)
N.W./G.W.: 35/40KG



BCD-142

Cooling: By compressor, temperature range 0-10°C ; -25°C to -10 °C
Refrigerant: R600a/R290
Input Power: 94W
Voltage: 110V/60HZ or AC220V/50HZ
Climate class: N
Unit size: 445×480×1210MM(W×D×H)
Carton size: 500×520×1288 MM(W×D×H)
N.W./G.W.: 35/40KG
FCL: 183PCS/40HQ



Medical Refrigerator



JGA-BC29

Capacity:29L

Cooling:By compressor;no frost,anti-vibration;circulated air

Tem.range:2°C to 8°C, inner body temp. difference in 2°C

Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest

Refrigerant: R600a/R134a/R290

Voltage:AC110V/60Hz, 200-240V/50Hz

N.W./G.W.:25/27KG

Interior size:361×205×400MM(WxDxH)

Product size:445x458x539MM(WxDxH)

Carton size:500x525x585MM(WxDxH)

FCL:132PCS/20GP 276PCS/40GP 368PCS/40HQ



JGA-BC228

Capacity:228L

Cooling:By compressor;no frost,anti-vibration;circulated air

Tem.range:2°C to 8°C, inner body temp. difference in 2°C

Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest

Refrigerant: R600a/R134a/R290

Voltage:AC110V/60Hz, 200-240V/50Hz

N.W./G.W.:46/50KG

Interior size:A,505×441×880MM(WxDxH)

B,505×310×165MM(WxDxH)

Product size:595×622×1260MM(WxDxH)

Carton size: 662×690×1315MM(WxDxH)

FCL:54PCS/20GP 108PCS/40GP 162PCS/40HQ

JGA-BC168

Capacity:168L

Cooling:By compressor;no frost,anti-vibration;circulated air

Tem.range:2°C to 8°C, inner body temp. difference in 2°C

Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest

Refrigerant: R600a/R134a/R290

Voltage:AC110V/60Hz, 200-240V/50Hz

N.W./G.W.:46/50KG

Interior size:A,505×441×460MM(WxDxH)

B,505×310×165MM(WxDxH)

Product size:595×622×840MM(WxDxH)

Carton size: 662×690×895MM(WxDxH)

FCL:54PCS/20GP 108PCS/40GP 162PCS/40HQ



JGA-BC105

Capacity:105L

Cooling:By compressor;no frost,anti-vibration;circulated air

Tem.range:2°C to 8°C, inner body temp. difference in 2°C

Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest

Refrigerant: R600a/R134a/R290

Voltage:AC110V/60Hz, 200-240V/50Hz

N.W./G.W.:60/65KG

Interior size:A,280×300×1324MM(WxDxH)

B,280×135×136MM(WxDxH)

Product size:360x404x1812MM(WxDxH)

Carton size: 408x445x1870MM(WxDxH)

FCL:70PCS/20GP 145PCS/40GP 145PCS/40HQ





Medical Refrigerator



JGA-BC328
Capacity:328L
Cooling:By compressor;no frost,anti-vibration;circulated air
Tem.range:2°C to 8°C, inner body temp. difference in 2°C
Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest
Refrigerant: R600a/R134a/R290
Voltage:AC110V/60Hz, 200-240V/50Hz
N.W./G.W.:72/77KG
Interior size:A,505×441×1180MM(WxDxH)
 B,505×310×165MM(WxDxH)
Product size:595×622×1560MM(WxDxH)
Carton size: 660×690×1615MM(WxDxH)
FCL:27PCS/20GP 54PCS/40GP 54PCS/40HQ



JGA-BC680
Capacity:628L
Cooling:By compressor;no frost,anti-vibration;circulated air
Tem.range:2°C to 8°C, inner body temp. difference in 2°C
Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest
Refrigerant: R600a/R134a/R290
Voltage:AC110V/60Hz, 200-240V/50Hz
N.W./G.W.:130/140KG
Interior size:915×410×1418MM(WxDxH)
Product size:1000x500x1980MM(WxDxH)
Carton size:1075x590x2040MM(WxDxH)
FCL:20PCS/20GP 40PCS/40GP 40PCS/40HQ

JGA-BC448
Capacity:448L
Cooling:By compressor;no frost,anti-vibration;circulated air
Tem.range:2°C to 8°C, inner body temp. difference in 2°C
Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest
Refrigerant: R600a/R134a/R290
Voltage:AC110V/60Hz, 200-240V/50Hz
N.W./G.W.:87/90KG
Interior size:A,505×441×1440MM(WxDxH)
 B,505×310×165MM(WxDxH)
Product size: 595×622×1820MM(WxDxH)
Carton size: 662×690×1875MM(WxDxH)
FCL:27PCS/20GP 54PCS/40GP 54PCS/40HQ



JGA-BC728
Capacity:728L
Cooling:By compressor;no frost,anti-vibration;circulated air
Tem.range:2°C to 8°C, inner body temp. difference in 2°C
Features:White plastic cated shelves;2 layer of glass door with lock ;white LED light or as per reuquest
Refrigerant: R600a/R134a/R290
Voltage:AC110V/60Hz, 200-240V/50Hz
N.W./G.W.:145/155KG
Interior size:1265×410×1418MM(WxDxH)
Product size:1350x500x1980MM(WxDxH)
Carton size: 1425x590x2040MM(WxDxH)
FCL: 12PCS/20GP 24PCS/40GP 24PCS/40HQ



Vending Machine

JGA-BC1400

Capacity:1400L

Cooling : By compressor , temperature can be adjustable between 0 to 30 °C.

Humidity : 35% to 75%


Refrigerator: R134a/R600a

Voltage :AC220V/50HZ ;AC110V/60HZ

Product size :1340x832x1920MM(WxDxH)

Input power:450W

Input power:360W

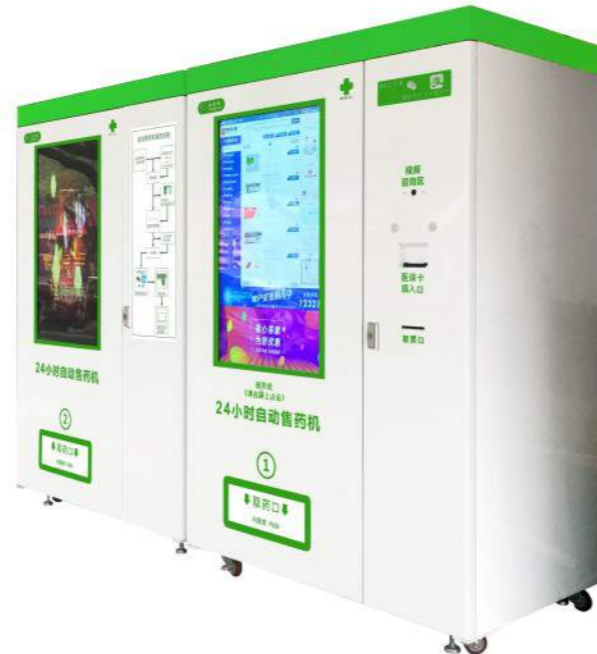

1,Medical machine production license

2,Big screen reveal:Deploy 43inch LCD clearly touch screen.Can play advertising video and picture remotely.with 7 functions in the menu.Forexample:temperature and humidity control(temperature and humidity instrucion.Mainly use for show temperature and humidity inside ofthemachine)videocall,advertisingshow,choose prompt,show pharmacy license,pharmaceutical license,GSP certificate,pharmacist certificate.The user can check the menu search the relevant data as he need.

3,Touch control:can click on the screen directly.Available network:wireless WIFI and wired.Talk with video:can see a doctor by video.Identify intelligent:Control system by microcomputer that can check data ,identify,fault diagnosis and so on. Infrared detection:infrared detection which confirm the correct medicine.Payment term:by wechat,alipay,medical card.

4,Big capacity:two store space,two temperature and humidity area.Can sell different size medicine.There are 70-90 goods roads which can put in 700-900 pcs medicine boxes.And can put many kinds of medicine at the same time.Store environment:The temperature and humidity of the medicine can be adjusted according environmental. With two areas of the temperature and humidity each machine.Temperature can be setted about 10-30°C , humidity is 35%-75%.It can give an alarm when in high or low temperature.Support uploading checking and share the data of working temperature and humidity.One main and serval deputy:Can use main machine separately,and also can use one main machine and serval deputy.So that can meet more people needs.Energy consumption control:With watt-hour meter.can check the electricity consumption at any time.Safe use:electric leakage protection ,can use safely.